



CROSS
TRANS
SERVICE
HAMBURG

INTERNATIONAL FREIGHT FORWARDER




CONTAINERARTEN

© WWW.CROSSTRANS.COM

Dry / Steel		Door openings (mm)		Internal dimensions (mm)			Weight (kg)			Volume (m3)
Type	Size	Width	Height	Length	Width	Height to load line	Max. Gross	Tare	Max. Payload	Capacity to load line
20" std	20'x8'x8'6"	2,340	2,274	5,896	2,350	2,385	27,000	2,150	24,850	33
40" std	40'x8'x8'6"	2,339	2,274	12,035	2,350	2,393	32,500	3,700	28,800	67
40" high	40'x8'x9'6"	2,340	2,577	12,035	2,350	2,697	34,000	3,800	30,200	76
45" high	45'x8'x9'6"	2,340	2,585	13,556	2,352	2,697	32,500	4,800	27,820	86



Dry / Aluminium		Door openings (mm)		Internal dimensions (mm)			Weight (kg)			Volume (m3)
Type	Size	Width	Height	Length	Width	Height to load line	Max. Gross	Tare	Max. Payload	Capacity to load line
40" wide door	40'x8'x8'6"	2,343	2,278	12,056	2,347	2,379	32,500	2,790	29,710	67
40" high	40'x8'x9'6"	2,343	2,584	12,056	2,347	2,684	32,500	2,900	29,600	76
45" high	45'x8'x9'6"	2,340	2,584	13,582	2,347	2,696	32,500	3,900	28,600	86

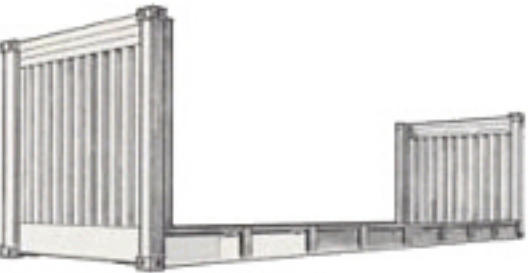

Flat rack / Steel		Internal dimensions (mm)									
Type	Size	Length	Width	Height	Length between headers	Length between corner posts	Width between corner posts	Gross	Tare. Payload	Max. payload	
20 fixed-corner	20'x8'x8'6"	5,935	2,398	2,327	5,935	5,693	2,106	24,000	2,560	21,440	
20 collapsible	20'x8'x8'6"	5,966	2,418	2,286	5,850	5,422	2,058	30,480	2,970	27,510	
40 fixed-corner	40'x8'x8'6"	12,080	2,438	2,103	12,080	11,796	2,114	30,480	5,480	25,000	
40 open-end	40'x8'x9'6"	12,192	2,230	1,986	11,900	11,710	2,178	45,000	4,500	40,500	
40 flush-fold	40'x8'x9'6"	12,178	2,365	1,943	12,058	11,662	2,224	45,000	5,200	39,800	

Flat rack / Steel		Internal dimensions (mm)							Weight (kg)		
Type	Size	Length	Width	Height	Length between headers	Length between corner posts	Width between corner posts	Gross	Tare. Payload	Max. payload	
40	40'x8'x20'3/8"	5,935	2,398	2,327	5,935	5,693	2,106	24,000	2,560	21,440	


Flat rack / Steel		Internal dimensions (mm)		Maximum load (kg)		Weight (kg)			
Type	Size	Length	Width	Concentrated (kg/sq.foot)	on mid 10 ft	Max. gross	Tare	Max. payload	
40	40'x8'x20'3/8"	12,052	2,438	4,535	12,148	44,440	4,860	39,580	



Reefer / Steel		Door openings (mm)		Internal dimensions (mm)			Weight (kg)			Volume (m3)
Type	Size	Width	Heigth	Length	Width	Height to load line	Max. Gross	Tare	Max. Payload	Capacity to load line
20" std	20'x8'x8'6"	2,294	2,201	5,451	2,290	2,156	30,480	2,930	27,550	27,9
40" high	40'x8'x9'6"	2,278	2,473	11,578	2,280	2,425	34,000	4,500	29,500	64



Reefer / Aluminium		Door openings (mm)		Internal dimensions (mm)			Weight (kg)			Volume (m3)
Type	Size	Width	Heigth	Length	Width	Height to load line	Max. Gross	Tare	Max. Payload	Capacity to load line
20" std	20'x8'x8'6"	2,286	2,188	5,430	2,286	2,155	27,000	2,750	24,250	26,8
40" std	40'x8'x8'6"	2,294	2,174	11,577	2,294	2,110	32,500	3,900	28,600	56,1
40" high	40'x8'x9'6"	2,290	2,535	11,577	2,294	2,409	32,500	4,150	28,350	64,1
45" high	45'x8'x9'6"	2,290	2,535	13,102	2,294	2,409	32,500	5,200	27,300	72,4

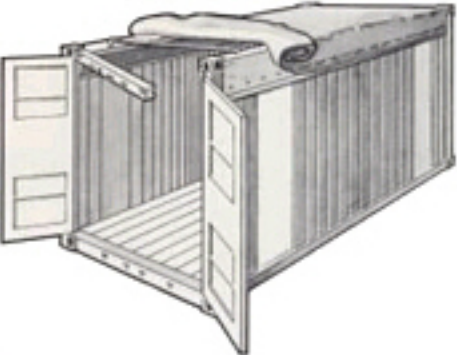

Open-tops / Steel		Internal dimensions (mm)			Door opening (mm)		Top opening (mm)		Weight (kg)			Volume (m3)
Type	Size	Length	Width	Height	Width	Height	Length	Width	Max. gross	Tare	Max. payload	Capacity
20	20'x8'x8'6"	5,919	2,340	2,286	2,286	2,251	5,425	2,223	24,000	2,177	21,823	32
40	40'x8'x9'6"	12,043	2,338	2,272	2,289	2,253	11,622	2,162	30,480	4,300	26,180	64